


LAS1011 Firtree® Seal

Medium Duty



LAS1011
Firtree®



■ Description

The Firtree® seal comprises a barbed spine that incorporates two flexible sealing fins. It simply push-fits into a 3mm wide x 5mm deep groove to provide an effective acoustic seal.

■ Key benefits

Ideal for double swing door applications as seal allows bypass of pivot hardware.
Simply push fits into a pre-prepared groove.
Fins are co-extruded to spine for reliable long term durability.
Seal surface and fins contain anti-microbial additives to restrict bacterial growth.

■ Approvals

Fire: Approved for use on proprietary AS1905.1 fire doors for up to 4 hour fire rating.

Smoke: Conforms with BCA Specification C3.4 smoke sealing requirements.

Sound: Acoustically tested in accordance with ISO10140-2 and AS/NZS717.1 with ratings up to 38Rw on appropriate rated assemblies.

Durability: Long term mechanical test, completing 1,000,000 cycles without failure.

■ Standard lengths

2.1m and 2.75m.

■ Fixing method


Friction fit into 3mm wide x 5mm deep groove.

■ Gap sizes

2mm - 3mm.

■ Finish

Standard colour: Black with black fins.

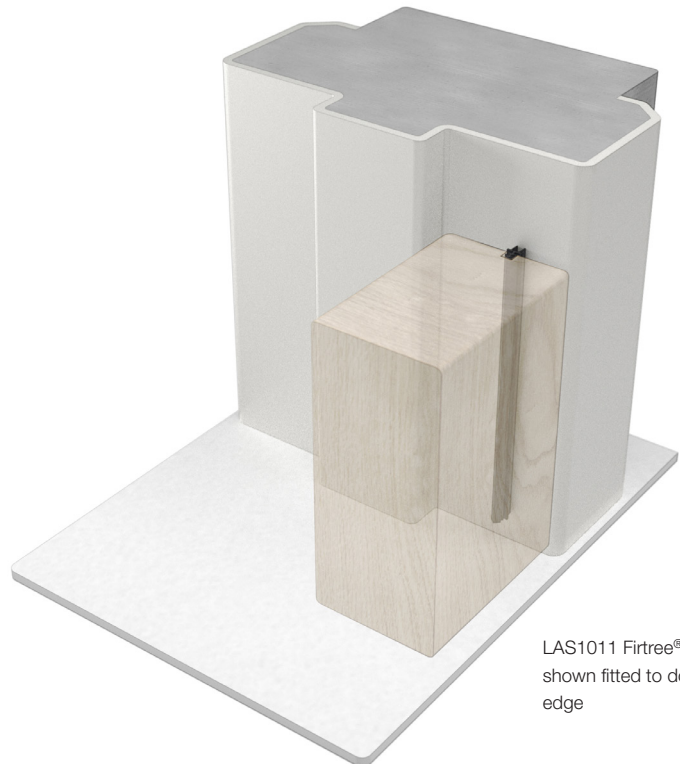

LAS1011 Firtree® seal shown fitted to door edge