


## LAS4002 Threshold Plate

Medium Duty



LAS4002

### Description

Used where the door sill is uneven, this threshold plate creates a level sealing surface that greatly enhances the ability of door bottom seals to restrict the passage of sound, smoke, energy or weather.

### Key benefits

- Creates a flat sealing surface.
- Enhances the performance of other sealing systems.
- Slim-line geometry satisfies AS1428.1 access for people with disability requirements.
- Durable hard wearing anodised finish.

### Approvals

**Fire:** Approved for use on proprietary AS1905.1 fire doors for up to 4 hour fire rating.

**Smoke:** Tested in accordance with AS1530.7 on AS6905 compliant door assemblies.

**Sound:** Acoustically tested as part of a system in accordance with ISO10140-2 and AS/NZS717.1.

### Standard lengths

1m and 2.1m. Other lengths available to special order.

### Fixing method

Mechanically fixed to threshold with supplied screw pack or adhered with construction adhesive.

### Gap sizes


Minimum 6mm door undercut.

### Finishes

Silver anodised aluminium.



LAS4002

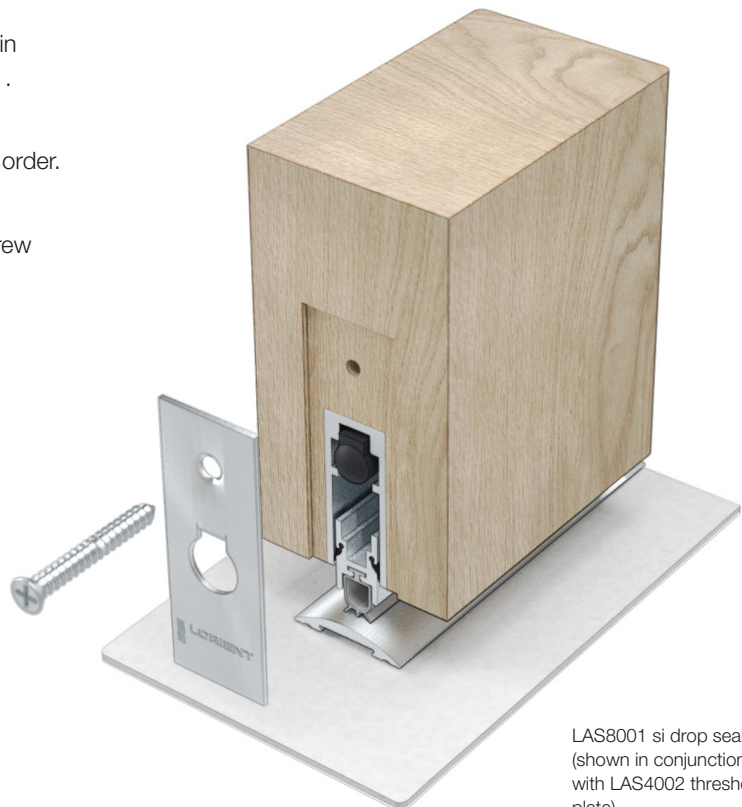

LAS8001 si drop seal  
(shown in conjunction  
with LAS4002 threshold  
plate)