

# 7501


## PERIMETER SEAL

Designed with a seamless curve for enhanced aesthetics, with proven performance for acoustic containment when installed around the head and jambs of doors. The decorative snap-on cover plate completely conceals fixings and is available in a range of finishes.


### MEDIUM DUTY



AAS7501

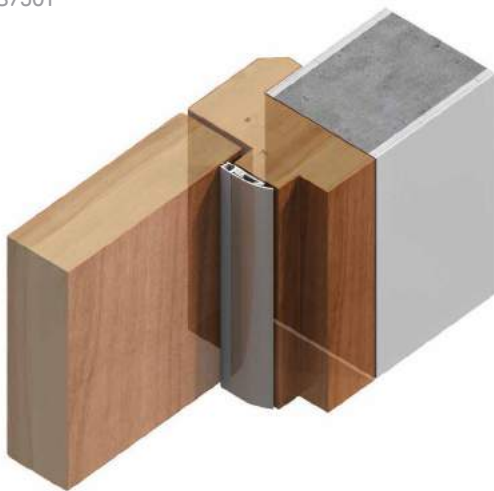

### TECHNICAL



AAS7501

#### Location

Head and jambs of single swing doors

#### Seal Material

Silicone rubber

#### Standard Lengths

- 1m and 2.1m
- Doorset packs
  - Single doorset pack (SDP): (1 x 1m, 2 x 2.1m)
  - Long single doorset pack (LSDP): (1 x 1m, 2 x 2.7m)
  - Double doorset pack (DDP): (3 x 2.1m)
  - Long double doorset pack

(LDDP): (1 x 2.1m , 2 x 2.75m).

- Other lengths available for special order Fixing

#### Fixing

Fixing holes pre-drilled and slotted for positional accuracy. Screw pack supplied.

#### Finishes

Silver anodised aluminium with grey silicone gasket.

### PERFORMANCE

#### Fire

Approved for use on proprietary AS1905.1 fire doors for up to 4 hour fire rating

#### Acoustic

ISO 10140-2 & AS/NZS ISO717.1

#### Weighted Sound Reduction Index

39 dB  
(AAS7501 & AAS8501 on a proprietary acoustic door)

#### Durability

1,000,000 cycles on full-size door assemblies