
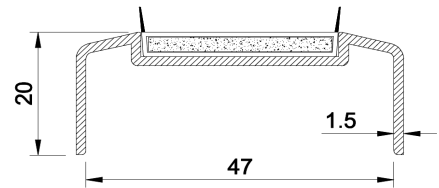


FDMS-BB

Bullnose Meeting Stiles

Extruded aluminium meeting stile sections incorporating intumescent seals.

Sections incorporate high performance intumescent material and flexible elastomeric fins to provide additional smoke control.

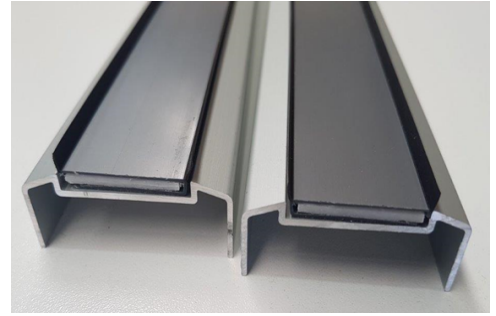

Application

Seals are applied to the long edges of fire door leaves and fitted to maintain the fire performance of proprietary double swing fire door assemblies.

Key Features

Supplied as a complete set for ease of installation.

Materials

Extruded anodised aluminium sections incorporating high performance intumescent fire and smoke seals.

Finish

Clear anodised finish with silver colour fire seal and black smoke fins.

Clearances

Maximum 3 mm or as per fire door manufacturers test data.

Supplied lengths

Standard profile sizing: 2135mm, 2440mm 3050mm

Fixing

Lorient Bullnose meeting stiles come pre-packaged with fitting instructions and fixing screws included. Simply cut to length, prepare fixing points, screw the aluminium sections to the door leaves and then fit the self-adhesive intumescent seals into place.

Approvals

AS1530.4 Part 4 for up to 2 hours on proprietary fire door assemblies in accordance with AS1905.1 Part 1
Conforms with NCC Specification C3.4 DTS smoke sealing requirements.

HOW TO ORDER:

Lorient FDMS-BB 2135mm

Lorient FDMS-BB 2440mm

Lorient FDMS-BB 3050mm