
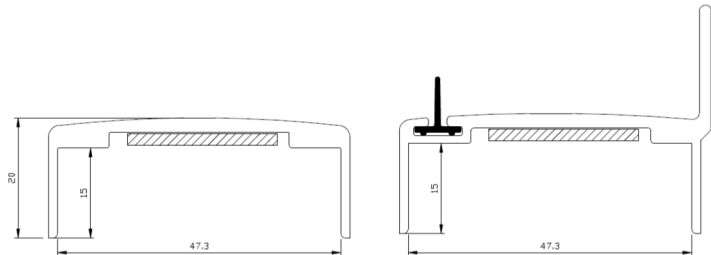


FDMS –T Bar

T-Bar meeting stiles

Extruded aluminium meeting stile sections suitable for use on double leaf, single swing maxi fire door assemblies.

Incorporating integral intumescent strips and silicone rubber gasket for acoustic and smoke control

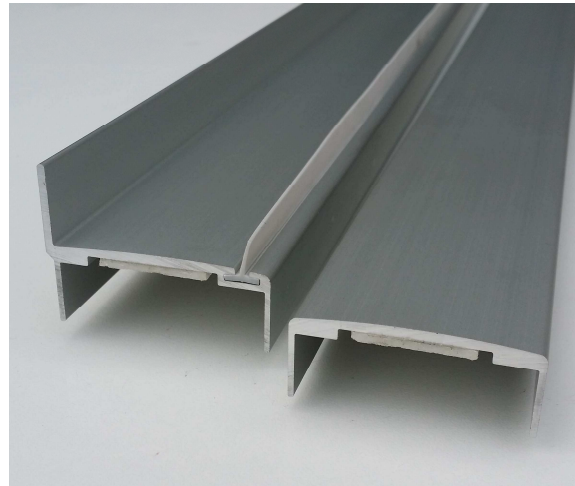

Application

Seals are applied to the long edges of fire door leaves and fitted to maintain the fire performance of proprietary 47mm thick Proprietary* maxi (double leaf, single swing) fire door assemblies.
(* e-core & Firecore)

Key Features

Supplied as a complete set for ease of installation.

Materials

Extruded anodised aluminium sections incorporating high performance intumescent fire and silicone rubber smoke seal.

Finish

Clear anodised finish with grey silicone rubber gasket .

Clearances

Maximum 3 mm or as per fire door manufacturers test data.

Supplied lengths

Standard profile sizing: 2135mm, 2440mm 3050mm

Fixing

Lorient T-bar meeting stiles come pre-packaged with fixing screws included. Simply cut to length, prepare fixing points, screw the aluminium sections to the door leaves and then fit the self-adhesive intumescent seals into place.

Approvals

AS1530.4 Part 4 for up to 2 hours on proprietary fire door assemblies in accordance with AS1905.1 Part 1
Conforms with NCC Specification C3.4 DTS smoke sealing requirements

HOW TO ORDER:

Lorient FDMS-T-Bar 2135mm
Lorient FDMS-T-Bar 2440mm
Lorient FDMS-T-Bar 3050mm